

CKC

LIGHT IT LIKE IT



V2s IP



Adopts 200W CW LED light source
 Total luminous flux 8,000 lumens
 Beam Angle 12° ~23° zoom
 CCT 20000K
 IP65 rating, resistant to harsh environments such as rain, dust, and extreme temperatures, suitable for both indoor and outdoor applications

OPTAL

- Source: 200W CW LED
- Output: 8000 Lm
- Beam angle: 12 ~ 23°
- CCT: 20000K
- CRI: 77
- Lens diameter: 76 mm
- Source lifetime: 20000 H

EFFECT

- Strobe: 1~25Hz
- LED refresh rate: 1200Hz~25KHz
- Rotation gobo wheel: 6 + 1
- Rotation gobo size: Outer diameter 23mm/Inner diameter 19mm/Thickness 0.5mm
- Color wheel: Wheel 1 (8 + 1) / Wheel 2 (8 + 1)
- Prism: 5 fact prism + 6 linear
- Frost: Light frost + Heavy frost

CONTROL & PROGRAM

- Channel: 17/20/22 CH
- Protocol: DMX512, RDM
- Data connector: 3PIN XLR
- Display: 1.8 inches touch screen, the operation panel has a rechargeable battery that allows you to access the menu to set the address code and make other settings without power on

SOFTWARE

- Via DMX signal to update
- Static waterproof fan, intelligent speed control
- Intelligent temperature protection to ensure LED service life

PAN & TILT MOVEMENT

- Pan: 540° or 630° 8bit/16bit
- Tilt: 270° 8bit/16bit

HOUSING

- Aluminum alloy structure + plastic (VO)
- Fan cooling
- Resistant to salt corrosion

POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 319 W

OTHER

- IP rating: IP65
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 359 × 239 × 488 mm
- N.W: 17.2 kgs

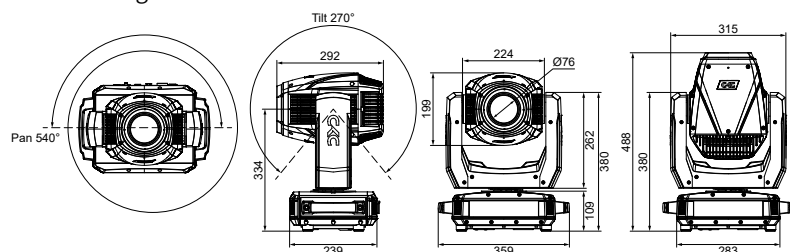


PHOTOMETRIC DATA

Distance(m)	0	5	8	15	30
12~23° CRI: 72					
Lux 12°		5847	2278	649	162
Diameter(m)		1.05	1.68	3.15	6.31
Lux 23°		3200	1244	354	88
Diameter(m)		2.03	3.26	6.10	12.21

ROTATION GOBO



COLOUR

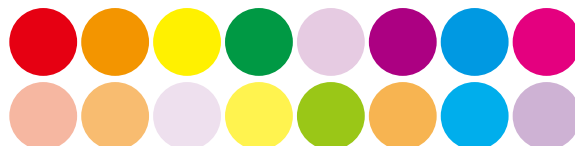

PRISM



FROST

