




LIGHT IT LIKE IT



V6 IP

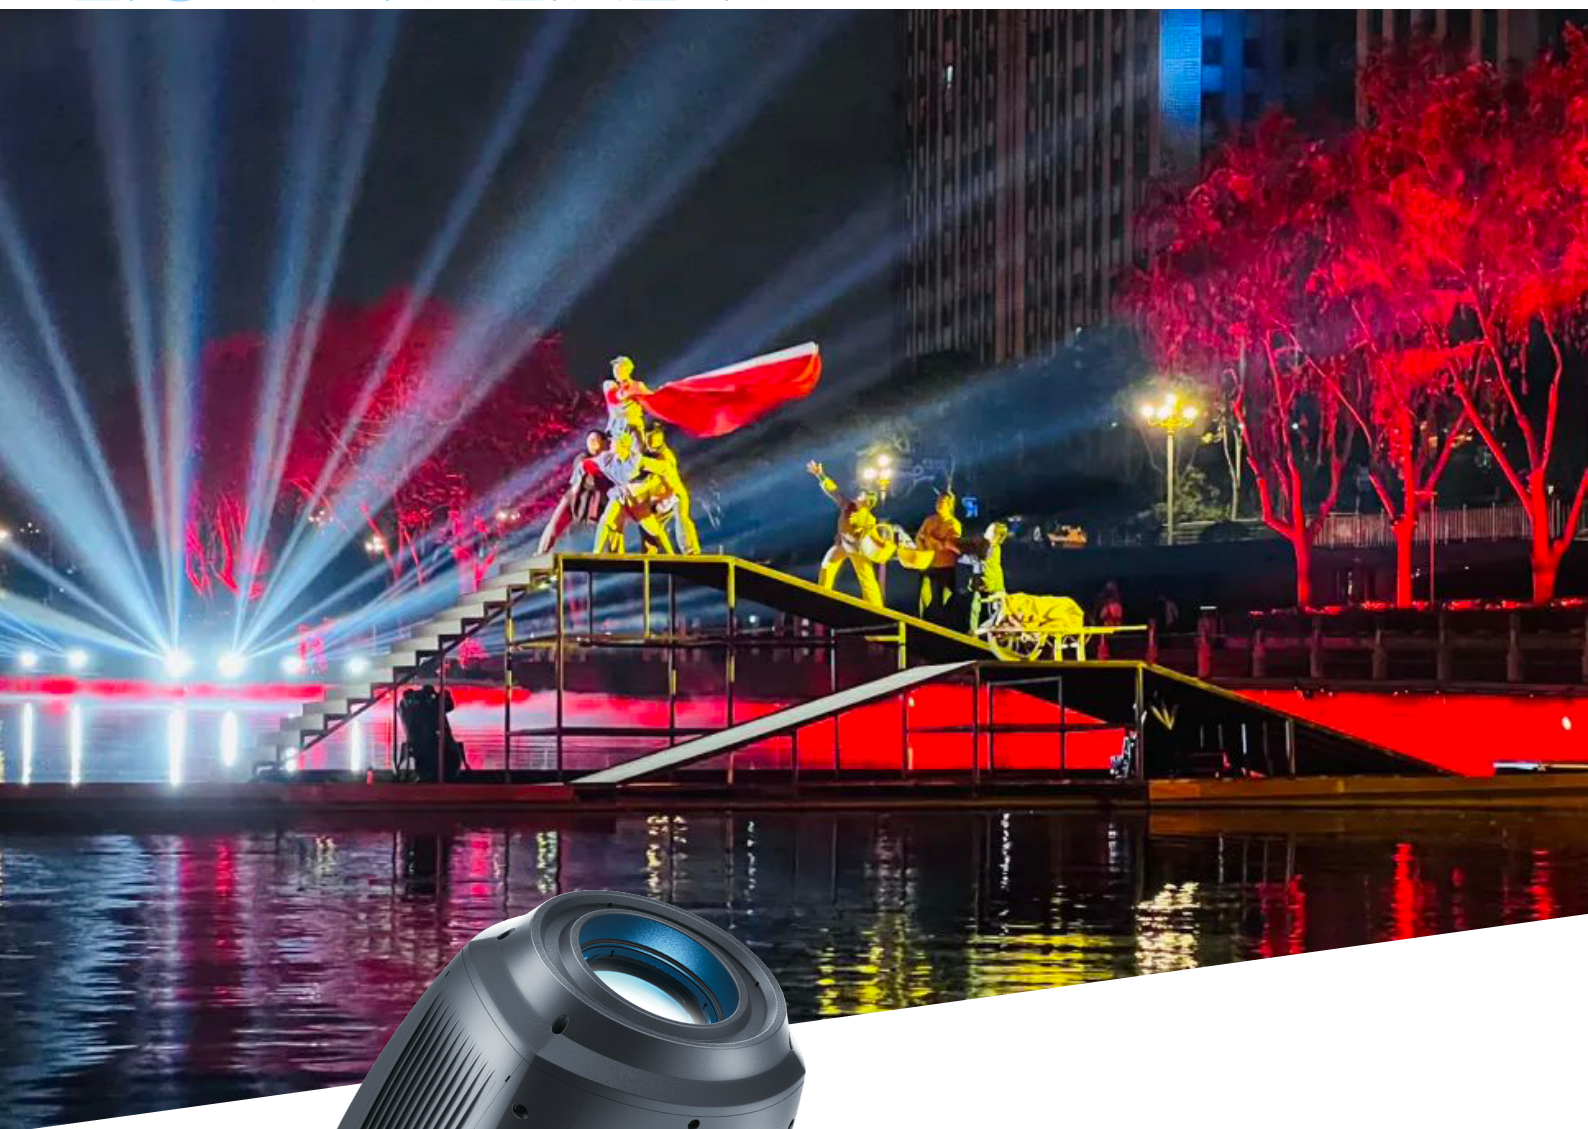

Adopts 600W CW LED light source
 Total luminous flux 26,300 lumens
 Beam Angle 6° ~44° zoom
 CCT 6800K
 IP65 rating, resistant to harsh environments such as rain, dust, and extreme temperatures, suitable for both indoor and outdoor applications

OPTAL

- Source: 600W CW LED
- Output: 26300 Lm
- Beam angle: 6 ~ 44°
- CCT: 6800K
- CRI: 72
- Lens diameter: 115 mm
- Source lifetime: 20000 H

EFFECT

- Strobe: 1~25Hz
- LED refresh rate: 1200Hz~25KHz
- Rotation gobo wheel: 7 + 1
- Fixed gobo wheel: 8 + 1
- Gobo size: Outer diameter 23mm/Inner diameter 19mm/Thickness 1.1mm
- Color wheel: 7 + 1
- CMY + CTO
- Prism: 4 fact prism + 6 linear
- Frost: Light frost + Heavy frost
- Animation + With iris
- Framing: With 4 blade, can achieve fast and smooth cutting. The framing direction and angle of each blade can be controlled separately, and the each brade can realize complete beam closing. The whole cutting module can be rotated by $\pm 60^\circ$

CONTROL & PROGRAM

- Channel: 36/50/57 CH
- Protocol: DMX512, RDM
- Data connector: 3PIN XLR
- Display: 1.8 inches touch screen, the operation panel has a rechargeable battery that allows you to access the menu to set the address code and make other settings without power on

SOFTWARE

- Via DMX signal to update
- Static waterproof fan, intelligent speed control
- Intelligent temperature protection to ensure LED service life

PAN & TILT MOVEMENT

- Pan: 540° or 630° 8bit/16bit
- Tilt: 270° 8bit/16bit

HOUSING

- Aluminum alloy structure + plastic (VO)
- Fan cooling
- Resistant to salt corrosion

POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 990 W

OTHER


- IP rating: IP65
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 433 × 319 × 720 mm
- N.W: 38.4 kgs

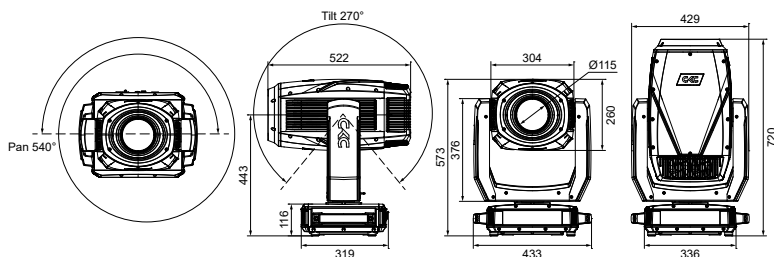

PHOTOMETRICAL DATA

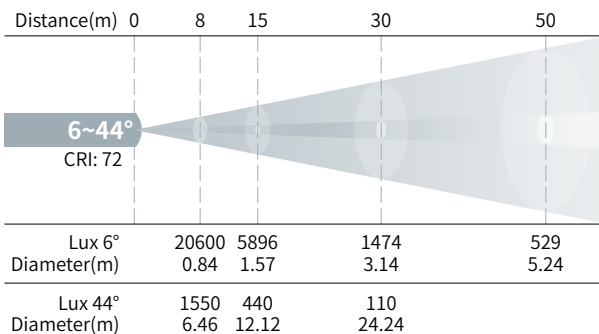

ROTATION GOBO



FIXED GOBO



COLOUR



FRAMING BLADES



ANIMATION



PRISM



FROST

